



CIXI NEW DIRECTION ELECTRONICS CO., LTD

TEL:086-18094587118 E-MAIL:nbcxyk@kingindicator.com



We Are Making Different Carp Alarm

< User Manual >



www.kingindicator.com



EC DECLARATION OF CONFORMITY

NO.:ND-20150202-RTTE

We:
CIXI NEW DIRECTION ELECTRONICS CO.,LTD
Xiangge Building 1904#
Kaifa Rode
Cixi
Ningbo
Zhejiang
CHINA.

Declare under our own responsibility that the products:
-K9 Bite Alarm
-Th9 Anti-theft alarm
-R9 Mini Receiver
to which this declaration refers, conform with the relevant standards of other
standardising documents:

ETSI EN 300-220-1 v2.4.1
ETSI EN 300-220-2 V2.4.1
ETSI EN 301-489-1 v1.6.1
ETSI EN 301-489-3 v.1.9.2



according to the regulations in the R&TTE Directive 1999/5/EC.

NingBo.China.06th.Feb.2015

Authorised Person: Ke Yan (Managing Director)

Signature

What is remote control mode

In short, it is easy to remote control
the functions of bite alarm(k9),
such as volume, tone,
sensitivity&night light,
when you stay at the shelter

Battery and duration time

Item	Battery Model	Remote control mode	Normal mode
K9	2*ER14250(CR2)	300 Hours	60,000 Hours
R9	2*ER14250(CR2)	300 Hours	300 Hours
TH9	2*ER14250(CR2)	300 Hours	60,000 Hours

Download the APP from kingindicator.com

IOS operating system

iPad (4th generation), iPad (3rd generation)

iPhone 4S, iPhone 4,

iPhone 5 iOS 6.0 and later versions

iPad mini

iPhone 5s, iPhone 5c

iPad air




Android operating system

Compatible with Samsung, LG, Sony, HTC, Sony Ericsson, Motorola, Huawei and 6000+ other smartphone models and tablets.




K9 ALARM

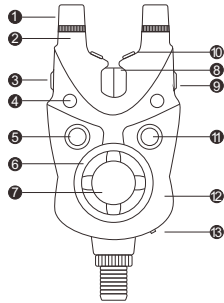


- 1.light house cover
- 2.Aotomatic night light
- 3.Mute 30'/night light ON(off,aoutmatic)
- 4.RGB LEDs
- 5.Volume control
- 6.Halo for ninght light
- 7.Loudspeaker
- 8.Light roller wheel
- 9.Tone control/prow on(off)
- 10.Non-slip rod seat
- 11.Sensitivity control
- 12.Er1425 battery*2 or CR2*2
- 13.Power outlet
- 14.Light house

R9 RECEIVER



- R1.Power On/Off
 Left:Vibration
 Middle:OFF
 Right:ON
- R2.LEDs
- R3.Display
- R4.Multi-function button
-
- R5.Loudspeaker
- R6.Er1425 battery*2 or CR2*2


Th9 ANTI-THEFT ALARM

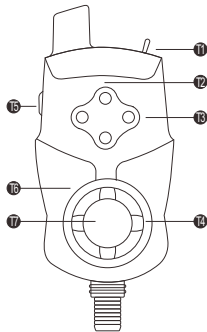

- T1.Power On(Off)/Retome control mode
-
- Left:ON
 Middle:OFF
 Right:Remote control mode
- T2.Infrared sensor
- T3.LEDs
- T4.Halo for low power
- T5.Turn On/Off LEDs
 hold press:turn ON(off) anti-theft function
- T6.Er1425 battery*2 or CR2*2
- T7.Loudspeaker


REMOTE CONTROL MODE OF K9

FIGURE 1

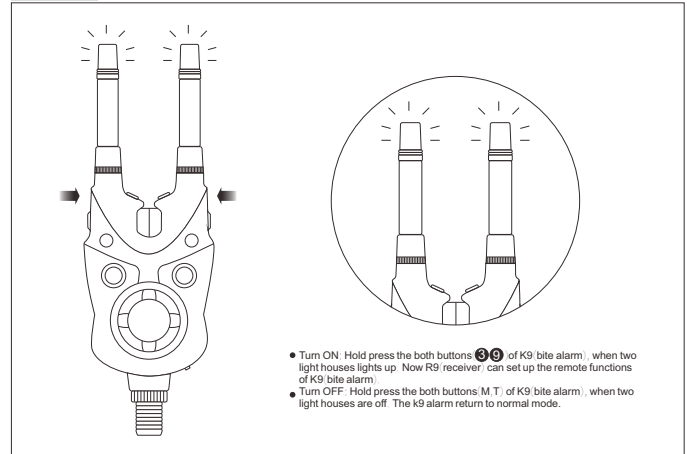


SYSTEM MENU OF R9

FIGURE 2

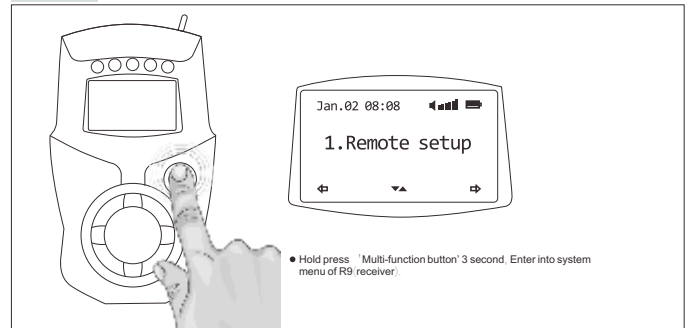


A.HOW TO REGISTER BITE ALARMS

1. Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver).SEE FIGURE 2
2. Down to choose 'Register ALARM'menu, then press it.

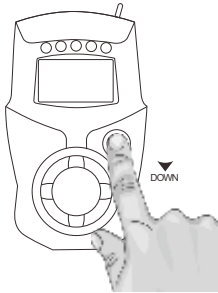


3. Choose which color do you want to register

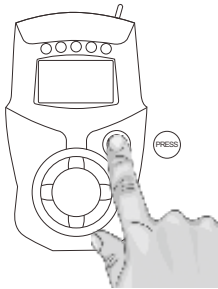


- A.RED CHA
- B.GREEN CHA
- C.BLUE CHA
- D.YELLOW CHA
- E.PURPLE CHA
- F.A-EFT CHA
- H.Clear all CHA

4. Turn ON the Remote control mode of K9. SEE FIGURE 1

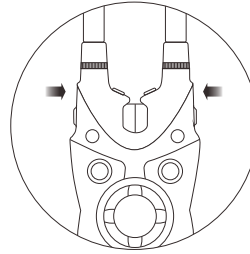

5. Please turn wheel of the K9 (bite alarm).

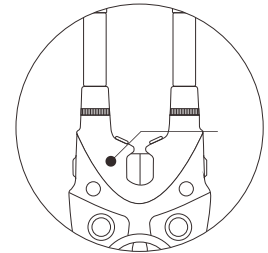


6. When you see the 'success' on the screen, it have registered.




B.HOW TO REGISTER ANTI-THEFT ALARM

1. Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver).SEE FIGURE 2
2. Down to choose 'Register ALARM'menu, then press it.

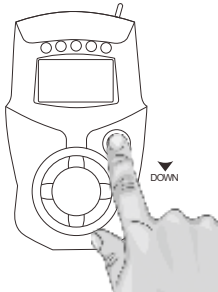


3. Choose menu A-EFT CHA

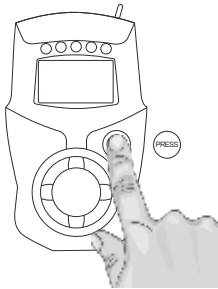


- A.RED CHA
- B.GREEN CHA
- C.BLUE CHA
- D.YELLOW CHA
- E.PURPLE CHA
- F.A-EFT CHA
- H.Clear all CHA

4. Turn ON the Remote control mode of TH9.SEE FIGURE 1

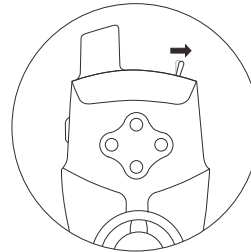

5. Hold press the button on the TH9(anti-theft alarm).

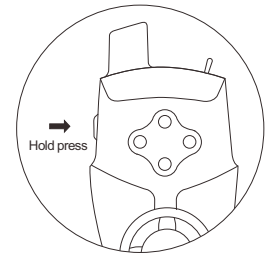


6. When you see the 'success' on the screen , it have registered.



C. HOW TO REMOTE CONTROL FUNCTIONS OF K9/TH9


1. Turn ON the Remote control mode of K9. SEE FIGURE 1



2. Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver). SEE FIGURE 2

3. Choose 'Remote setup' menu, Press it.

4. Choose which color alarm do you want to remote control.

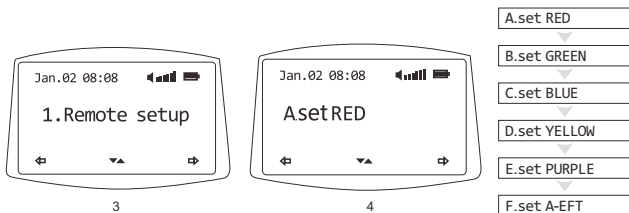

5. Left/Right to choose which function, Up/Down to set the value.

When you changed the value, the K9 will respond.




6. Please choose 'Exit' menu to return main menu.




D. RANGE TEST

1. Turn ON the Remote control. mode of K9. SEE FIGURE 1



2. Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver). SEE FIGURE 2


3. Choose 'Range test' menu, and press it

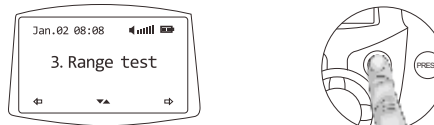


4. Choose which color do you want to range test, Press it.



5. Enter into the range test mode.

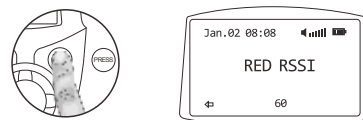

6. If they work fine, you will hear 'bi bi bi'. It is easy to test the range by yourself.

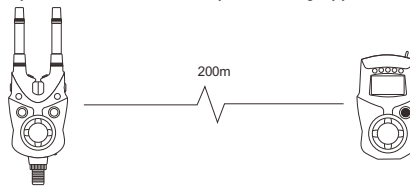

Please put the bite alarm on the rod pod, when you test the range.

E.DROP BACK SET

- 1.Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver).SEE FIGURE 2
- 2.Choose 'drop back set' menu, Press it



3. ▼▲ set ON/OFF.



- 4.Register your alarms again, you will find the alarm has changed.

F.DATE TIME SET

- 1.Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver).SEE FIGURE 2
- 2.Choose 'Date time set' menu,Press it.




3. ⇐ ⇨ choose Year/Month/Date/Hour/Minute/Exit, ▼▲ set the value of item.

Year	Month	Date
Hour	Minute	EXIT

G.BLUETOOTH SET

- 1.Turn ON the Remote setup mode of K9.SEE FIGURE 1



- 2.Hold press 'Multi-function button' 3 second, Enter into system menu of R9(receiver).SEE FIGURE 2
- 3.Choose 'Bluetooth set' menu , press it.



4. ▼▲ Turn on/off the Bluetooth. When you turn ON the Bluetooth, The icon of Bluetooth will flicker on the screen.



- 5.You can click the APP on you smart phone, It will be automaticly connected.